

4010081393 (Datalogic 3450i);  
4010081394 (Datalogic 9550i)



Pictures show sample configurations, real product may vary.



## DISPLAY

|                  |                                               |
|------------------|-----------------------------------------------|
| Surface hardness | 7H                                            |
| Display size     | 15.6"                                         |
| Aspect ratio     | 16:9 (Landscape mode)                         |
| Resolution       | 1920 x 1080 (Full HD)                         |
| Brightness       | 300 cd/m <sup>2</sup>                         |
| Touch technology | Projected Capacitive Touch (PCT) (10 touches) |
| Display cooling  | Passive                                       |

## COMPUTER UNIT

|           |                                                                |
|-----------|----------------------------------------------------------------|
| Processor | 12 <sup>th</sup> Gen. Intel® (Alder Lake-N) N97 up to 3.60 GHz |
| Memory    | 8 GB Standard, DDR4 3200 MT/s                                  |
| Drives    | 128 GB NVMe                                                    |
| OS*       | Windows 10 IoT OR 11 (in prep)                                 |

## POWER

|                   |                                                     |
|-------------------|-----------------------------------------------------|
| Power input       | 100-240 V AC, 50/60 Hz                              |
| Power consumption | 25 W Idle; 40 W Full load (no active print/scn job) |

## SYSTEM UNIT

|                    |                                                                                      |
|--------------------|--------------------------------------------------------------------------------------|
| Dimensions (WxDxH) | 583 × 552 × 556 mm/ (4010081392; 4010081393) OR<br>583 x 278 x 425.6 mm (4010081391) |
| Material           | Stainless steel, powder-coated                                                       |
| Weight             | 12 kg (4010081389 + 4010081391)<br>25 kg (4010081392 + 4010081393)                   |
| Mounting           | Desk mount                                                                           |
| Coating/Color      | Bi-Color RAL 7016/RAL 9005                                                           |

## CONFIGURATION

|                 |                                                                                                                                                                                                                                         |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Scanner/Imager  | Datalogic 3450i OR Datalogic 9550i                                                                                                                                                                                                      |
| Thermal printer | 1 x Epson TM-M30III                                                                                                                                                                                                                     |
| Payment ready   | various models via adapter                                                                                                                                                                                                              |
| Other           | HD Audio Codec; handheld scanner Datalogic Gryphon<br>GD4520 2D Barcode Scanner USB;<br>external I/O hub 1 x Powered USB 2.0 (12 V), 2 x USB 2.0;<br>1 x Powered USB 2.0 (24 V), 2 x RJ-45 (full signal)*;<br>speaker 2 × 1 W (Stereo)* |

## ENVIRONMENTAL CONDITIONS

|                              | Storage        | Operating     |
|------------------------------|----------------|---------------|
| Temperature                  | -20°C to +60°C | 10°C to +35°C |
| Humidity <sup>1</sup> (rel.) | 5% to 95%      | 20% to 85%    |

## CERTIFICATIONS

CE<sup>3</sup>

## INTENDED USE

The device may only be used as a touch panel in combination with the provided mounting elements (desk mount). Other mounting elements must be specified accordingly for the device. The central component of the system consists of a computer with a touchscreen. The touchscreen uses projective capacitive technology (PCT) to detect touches. The system is supplemented by built-in peripheral components. The device can be connected to an IT power distribution system.

\*optional

<sup>1</sup>non-condensing

<sup>3</sup>pending






<sup>2</sup>depending on configuration <sup>4</sup>additional items not included

U unattended | A attended | TA Tailwind adapter | KE constructive solution

## DIMENSIONS

Pictures show sample configurations, real product may vary.





4010081392 · 4010081393

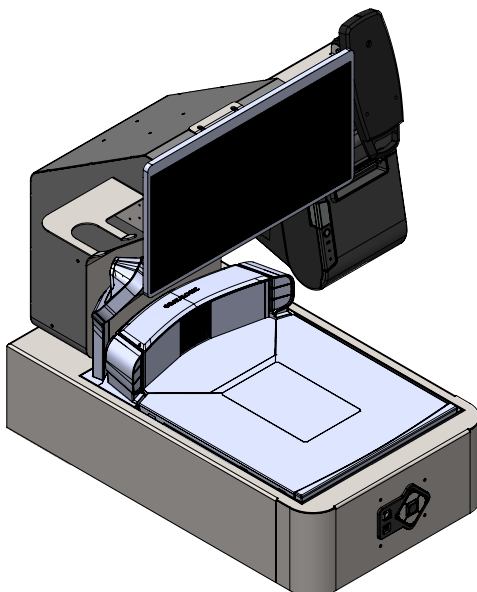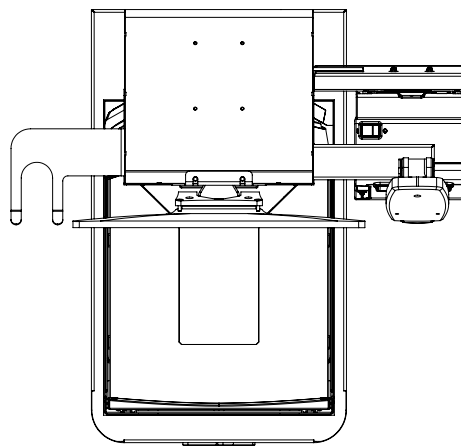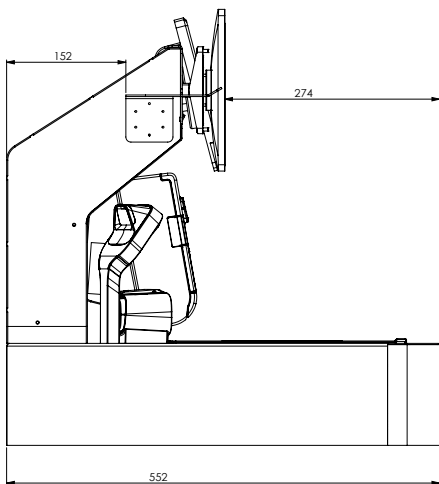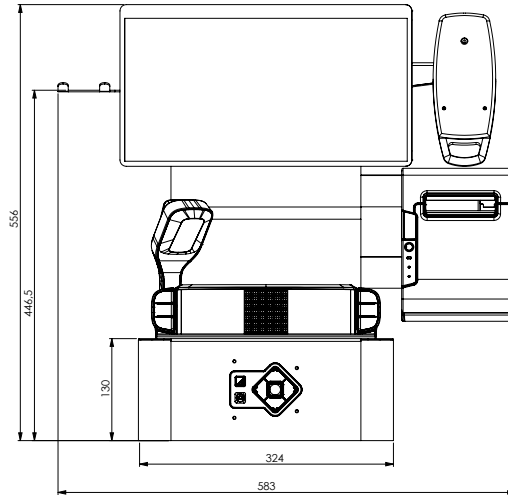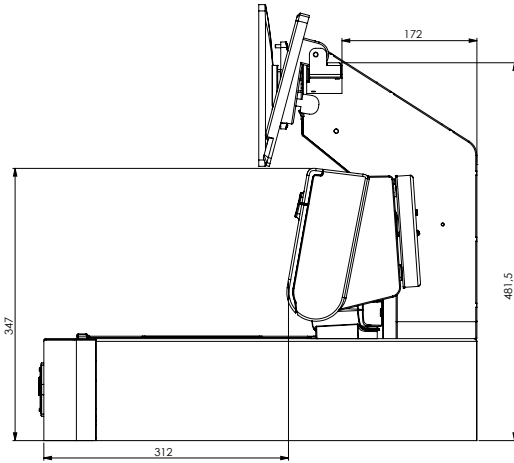

## DIMENSIONS

Pictures show sample configurations, real product may vary.

4010081391

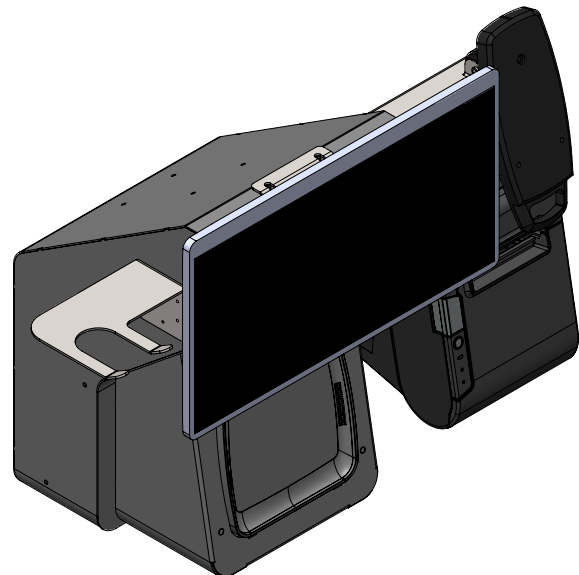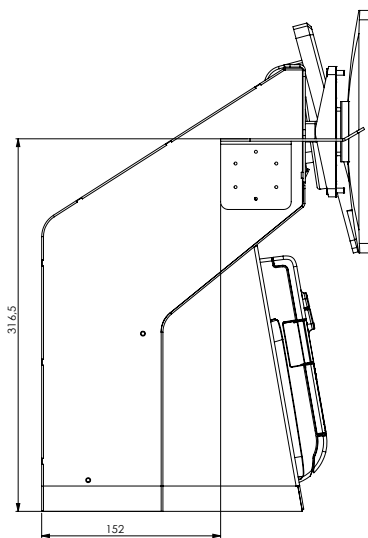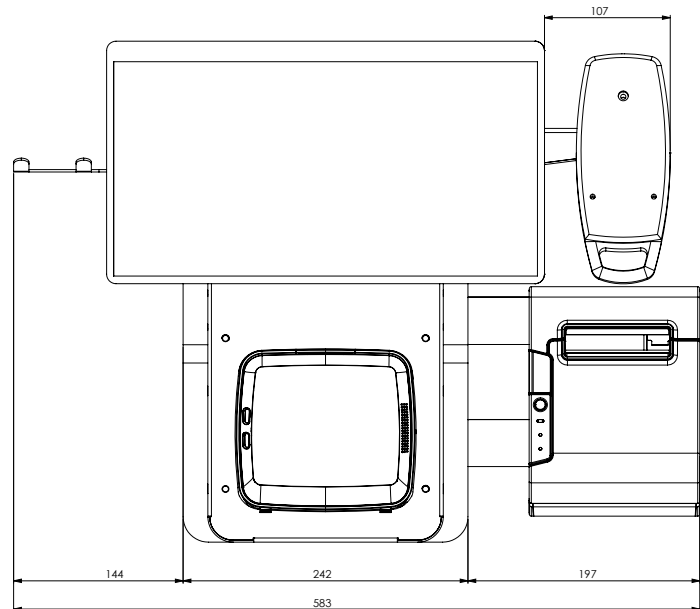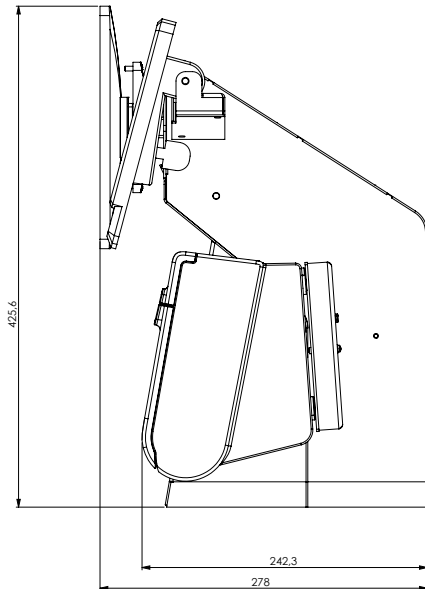

## DIMENSIONS

Pictures show sample configurations, real product may vary.

4010081389

