
AKHET® VarioFlex 5U 430



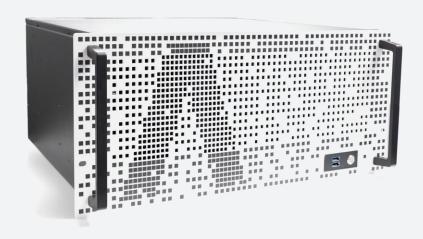

Pictures show sample configurations, real product may vary.

COMPUTER UNIT

Processor TDP	250W i a AMD Pyzan™ Throadrinner™ PPO		
PTOCESSOI TUP	350W i.e AMD Ryzen™ Threadripper™ PRO		
Graphics	up to 2 x RTX4080 Super		
Speicher	DDR5 ECC Registered Memory		
Data drive	M.2 NVMe SSD		
LAN	2 x 10 Gbe Intel® X710-AT2		
Expansion slots	6 x PCle 5.0 x16 1 x PCle 5.0 x16 (x8 mode)		
Front I/O	2 x USB 3.1 Type-A Power button		
Rear I/O	2 x USB4® Type-C 40 Gbps 6 x USB Type-A 10 Gbps 1 x USB 2.0 Type-A VGA Audio 2 x Mini-DisplayPort-IN BIOS Flashback AC-IN (C19 plug)		

POWER

Power supply	115-240 V AC
Power consumption	9 A

SYSTEM

Dimensions (WxDxH)	430 x 448 x 220 mm
Material	Coated sheet steel
Weight	Approx. 21 kg
Mounting	Rack with rails

ENVIRONMENTAL CONDITIONS

	Storage	Operating	
Temperature	−20°C to +60°C	15°C to 40°C	
Humidity	10% to 95% ¹	10% to 80%¹	

¹non-condensing

CERTIFICATIONS

CF

INTENDED USE

AKHET® Rack Systems are specifically designed to be mounted in standard equipment rack. The intended use includes data centres, virtualization, database management with specific needs of various workloads and applications. Operation and service of the product should be carried out by instructed personnel only to avoid risk of injury from electrical shock or energy hazard.





DIMENSIONS

 $\label{product may vary.} Pictures show sample configurations, real product may vary. \\$

